



# **PRTFOX**

## **Handheld Inkjet Printer**



# Contents



Product  
Introduction



Product  
Features



Instructions for  
use



Application  
scenario



# Product Introduction

# 1 Product structure



## 2 Packing list



**PRTFOX  
Printer**



**Ink  
cartridge**



**Manual**



**USB data line**



### 3 Product parameter

Content	Parameter
Model	PRTFOX
Communication mode	WiFi
APP	Android、Ios
Status Display	Green means ready status; blue means printing status; red means alarm status
Languages	Chinese, English, German, Arabic, Spanish, Russian, Japanese, Korean, Italian, Portuguese, French, Hindi, Thai, Vietnamese, Persian, Turkish, Traditional Chinese
Printing Content	Text, numbers, symbols, QR codes, barcodes, pictures, time, date, counter, etc.
Printing height	12.7mm
Printing distance	2-5mm (Distance between nozzle and object)
Ink capacity	42ml
Ink type	Solvent ink cartridge
Ink color	Black, Magenta, Cyan, Green
Printing material	Wood, carton, stone, pipe, metal, plastic, aluminum foil, cable, etc.

Content	Parameter
Image Format	JPG、BMP、PNG
Printing accuracy	300DPI
Printing speed	30m/min
Print area	12.7mm×500mm
Battery capacity	500mAH
Power	5V 1A
Continuous printing time	3 hours
Standby time	3.5 hours
Power interface	type-c
Weight	521g
Size	220*130*45mm
Working temperature	5-35°C
Working humidity	10%-80%



## **Product Features**



# 1 Features

Simple and stylish  
Humanized industrial  
User friendly compact design



Machine with ink  
cartridges  
Less than the weight  
of a bottle of milk

Pocket size design  
Easy to carry  
Anytime, anywhere,



Printing speed can be up  
to 30m/min  
Print as you want and print  
as you like

## 2 Portable protective cover



1. Concise and integrated design, the protective cover is multifunctional;
2. The design of the magnetic adsorption to protect the nozzle, easy operation with protection;
3. Prevent dry head and provide physical protection to make the ink cartridge more durable;
4. Just put on the protective cover of the nozzle after use, no need to remove ink cartridges frequently;

### 3 Push-in installation



1. The direct-push ink cartridge installation design allows you to install it with one push. It also provides upgrade protection for the ink cartridges;
2. The ink cartridges can be disassembled and assembled with electricity, there is no need to worry about damaging the print head;
3. Inductive integrated cover design, closing the cover can trigger the sensor. The device will enter into the printing state immediately.

## 4 Small space printing



Removable print head module design.  
Can print in a small space with a height less than 1.3cm and a width Larger than 3.6cm.

*Gouki* **Gouki**

*Gouki* **Gouki**


**Gouki**

**Gouki**

**Gouki** **Gouki**


- 1、 Chinese Fonts: 宋体、华文彩云、华文行楷、微软雅黑、华文琥珀
- 2、 Foreign fonts: Arial/Arial Black、Helvetica、Garamond、Frutiger、Bodoni、Futura、Times、Akzidenz Grotesk、Offician、 Gill Sans

## 6 Language settings

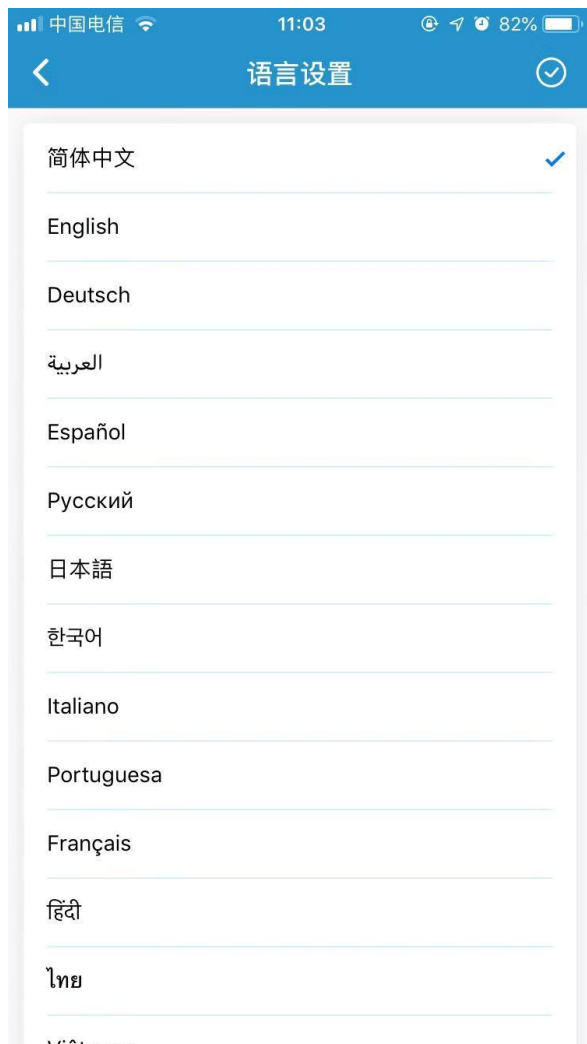

Chinese, English, German, Arabic, Spanish, Russian, Japanese, Korean, Italian, Portuguese, French, Hindi, Thai, Vietnamese, Persian, Turkish, Traditional Chinese

# 7 APP Introduction

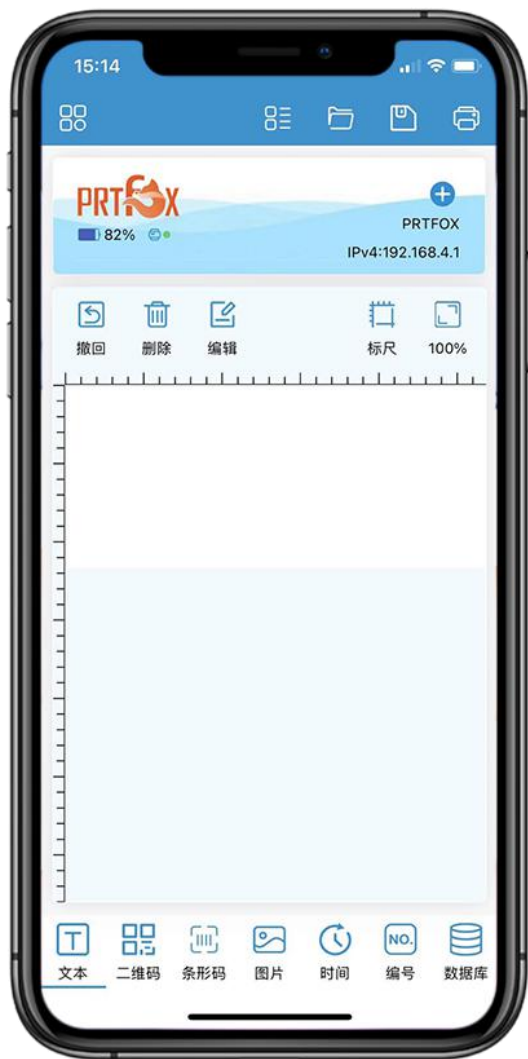

1.Operation interface



Andriod  
English Version



IOS



Andriod  
Chinese Version

2.APP Download Entry



## **Instructions for use**



# 1 Printing steps

1. Press the power button for 3 seconds, the indicator light turns on (the indicator light changes from white to green, and the printer is ready).

The indicator light  
from white to green



Power button

## 2 Printing steps

2. Connect the mobile phone to the WIFI with the machine name "PRTFOX--xxxxx" and enter the password: 12345678. After the connection is successful, the WIFI status light will change from blue to green.



When the status light changes from blue to green, the connection is successful


Connect and enter password



# 3 Printing Steps

3. "add" and "edit" the text you need, click "Print", the interface displays "Printing X times".

1、  
Click  
to edit  
text

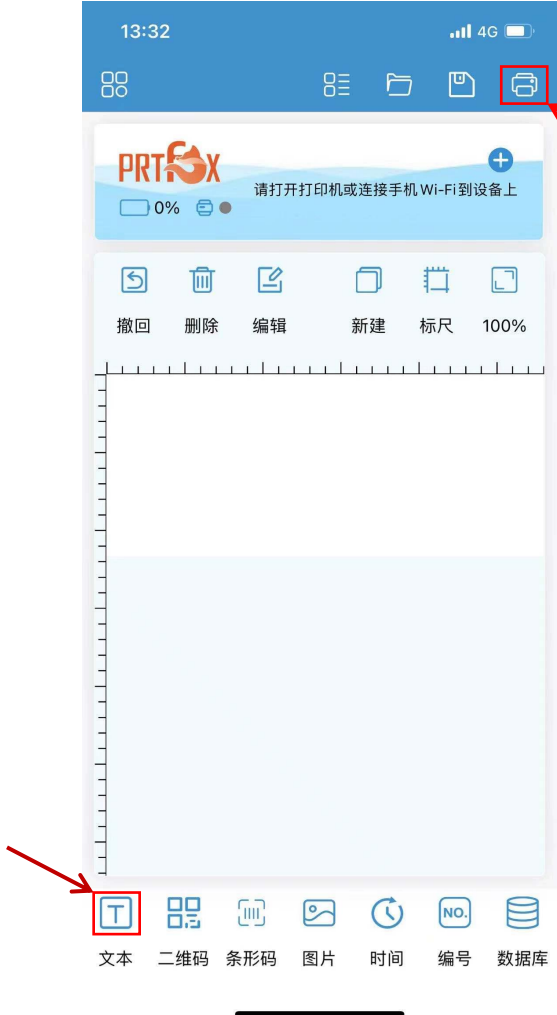

2、  
Click to  
print

Transmission  
success  
interface display



## 4 Printing Steps

4. After the machine's indicator light turns to blue, it means it enters the printing state, press the print button and print the content you need.

indicator  
light turns  
to blue





## **Application scenario**

# 1 Usage Scenarios



DIY Items



Home application



Outdoor Entertainment



Office Using



Production and retail



**Thanks!**

